



PFERD

PFERD
 M-Brad™ COMPOSITE WHEEL BRUSH
 6" DIA. x 7/8" AH 0.040 SIC 80
 CRIMPED FILAMENT
 EDP 841
 Made in USA
 RUNDBURSTE
 COMPOSITE WHEEL BRUSH
 RBUP 15

PFERD
 Germany

OS[®]
 Safety code
 EN 13 743
 80 m/s max.
 15 300 RPM

US-EDP: 61199
 With hub:
 US-EDP: 61219

WARNING:
 Improper use may
 cause property damage
 or serious injuries.
 Comply with:
 USA: ANSI B7.1 and
 OSHA regulations.
 AUS: AS 1788
 Use safety goggles
 and machine guards.

www.pferd.com
 100 x 16,0 mm
 4 x 5/8"

4 007220 919682

123456/01

CC-GRIND-SOLID
 CC-GRIND-SOLID 100 SG
 Stahl - Steel - Acier - Acero

PFERD
 Germany

OS[®]
 Safety code
 EN 12 413
 41 A 30 L
 37 50
 29 mm imp.
 4.000 RPM
 US-EDP: 64336


SG-ELASTIC
 80 T 350 - 3,0 A 30 L SG-CHOP-HD-INOX
 Stahl - Steel - Acier - Acero
 INOX-Stainless

PFERD
 Germany


OS[®]
 Safety code
 EN 12 413
 41 A 30 L
 37 50
 29 mm imp.
 4.000 RPM
 US-EDP: 64336

SG-ELASTIC
 EHT 115 - 1,0 A 60 R SG-INOX
 Stahl - Steel - Acier - Acero
 INOX-Stainless
 091 291


TRUST BLUE

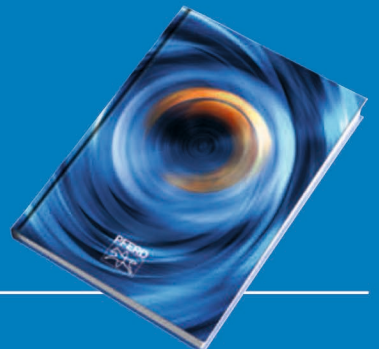

Rezna ploča za metal / inox PSF STEELOX




Promjer x širina x otvor u mm	Primjena	Maximalna brzina operacije	Maximalna RPM	Šifra artikla	Pakiranje
115x1,0x22,3	INOX/METAL	80 m/s	13,300 rpm	32585	25
115x1,6x22,3	INOX/METAL	80 m/s	13,300 rpm	40528	25
115x2,4x22,3	INOX/METAL	80 m/s	13,300 rpm	1099	25
125x1,0x22,3	INOX/METAL	80 m/s	12,200 rpm	32586	25
125x1,6x22,3	INOX/METAL	80 m/s	12,200 rpm	40531	25
125x2,4x22,3	INOX/METAL	80 m/s	12,200 rpm	1126	25
180x1,6x22,3	INOX/METAL	80 m/s	8,500 rpm	40530	25
180x2,4x22,3	INOX/METAL	80 m/s	8,500 rpm	1133	25
230x1,9x22,3	INOX/METAL	80 m/s	6,600 rpm	32054	25
230x2,5x22,3	INOX/METAL	80 m/s	6,600 rpm	3209	25




Vezivo
 Tvrd
 Stupanj kvalitete
 PSF
 Upotreba:
INOX I METAL

Brusna ploča za metal / inox PSF STEELOX




Promjer x širina x otvor u mm	Primjena	Maximalna brzina operacije	Maximalna RPM	Šifra artikla	Pakiranje
115x7,2x22,3	METAL/INOX	80 m/s	13,300 rpm	32073	10
125x7,2x22,3	METAL/INOX	80 m/s	12,200 rpm	32072	10
180x7,2x22,3	METAL/INOX	80 m/s	12,200 rpm	32077	10
230x7,2x22,3	METAL/INOX	80 m/s	8,500 rpm	32902	10



Vezivo
 Srednje
 Stupanj kvalitete
 PSF
 Upotreba:
METAL/INOX

Lamelarni brusni disk Z-PSF STEELOX




Dostupne granulacije

16	120	500
24	150	600
30	180	800
36	220	1000
40	240	1200
50	280	1500
60	320	2000
80	360	
100	400	

Dizajn
 Konveksni
 Vezivno sredstvo
 Smola
 Zrno
 Zirkon
 Podmetač
 Plastika armirana st. vlaknima
 Upotreba
METAL/INOX

Promjer u mm granulacija	Primjena	Maximalna brzina	Pak.	Maximalna RPM	Šifra artikla
115x22 40	METAL/INOX	80 m/s	10	13,300 rpm	32078
115x22 60	METAL/INOX	80 m/s	10	13,300 rpm	32080
115x22 80	METAL/INOX	80 m/s	10	13,300 rpm	1179
125x22 40	METAL/INOX	80 m/s	10	12,200 rpm	11798
125x22 60	METAL/INOX	80 m/s	10	12,200 rpm	11804
125x22 80	METAL/INOX	80 m/s	10	12,200 rpm	11814
180x22 40	METAL/INOX	80 m/s	10	8,500 rpm	32070
180x22 60	METAL/INOX	80 m/s	10	8,500 rpm	11976

Lamelarni brusni disk POLIFAN-STRONG STEEL



Dostupne granulacije


16	120	500
24	150	600
30	180	800
36	220	1000
40	240	1200
50	280	1500
60	320	2000
80	360	
100	400	

Dizajn

Konveksni
Vezivno sredstvo
Smola
Zrno
Al. cirkonijum
Podmetač
Plastika armirana st. vlaknima
Upotreba
METAL/INOX

Promjer u mm granulacija	Primjena	Maximalna brzina	Pak.	Maximalna RPM	Šifra artikla
115x22 36	METAL/INOX	80 m/s	10	13,300 rpm	11983
115x22 50	METAL/INOX	80 m/s	10	13,300 rpm	12024
125x22 36	METAL/INOX	80 m/s	10	12,200 rpm	19561
125x22 50	METAL/INOX	80 m/s	10	12,200 rpm	31774

Lamelarni brusni disk Z SGP CURVE STEELOX



Dostupne granulacije


16	120	500
24	150	600
30	180	800
36	220	1000
40	240	1200
50	280	1500
60	320	2000
80	360	
100	400	

Dizajn

Zaobljeni
Vezivno sredstvo
Smola
Zrno
Al. cirkonijum / Al. oksid
Podmetač
Plastika armirana st. vlaknima
Upotreba
METAL/INOX

Promjer u mm granulacija	Primjena	Maximalna brzina	Pak.	Maximalna RPM	Šifra artikla
115x22 40	METAL/INOX	80 m/s	10	13,300 rpm	19553
115x22 40	METAL/INOX	80 m/s	10	13,300 rpm	19556
125x22 40	METAL/INOX	80 m/s	10	12,200 rpm	32684
125x22 40	METAL/INOX	80 m/s	10	12,200 rpm	32515

Fiber disk CC-FS COMBICLICK VICTOGRAIN



Dostupne granulacije

16	120	500
24	150	600
30	180	800
36	220	1000
40	240	1200
50	280	1500
60	320	2000
80	360	
100	400	

Vezivno sredstvo

Smola
Zrno

Tip nanosa zrna

Zatvorena
Upotreba
METAL, INOX

Promjer x otvor u mm	Primjena	GR	Pak.	Tip rupe	Šifra artikla
115x22	METAL / INOX	36	25	☉ 30	32528
125x22	METAL / INOX	36	25	☉ 30	30041
180x22	METAL / INOX	36	25	☉ 30	30057

Set dijamantnih turpija
D 46 š(12029)




- DF 3608 Half-round
- DF 3609 Crossing oval
- DF 3610 Barrette
- DF 3614 Three square
- DF 3617 Hand
- DF 3619 Square
- DF 3621 Round



Četka za čišćenje
RGB 11506



Promjer x širina x otvor u mm	Primjena	Maximalna brzina operacije	Maximalna RPM	Šifra artikla	Pakiranje
115x6x22	METAL	80 m/s	12,500 rpm	32523	10
115x6x22	INOX	80 m/s	12,500 rpm	37318	10



Veživo
 Žica 0,50 mm
 Stupanj kvalitete
 Extra
 Upotreba:
METAL/INOX

Brusni čep
6ADW



Dostupne granulacije

- 46
- 50
- 60
- 80
- 120

Veživno sredstvo
 Smola
 Zrno
 Al. oksid
 Upotreba
METAL/INOX

Promjer u mm	Granulacija	Primjena	Pak.	Maximalna RPM	Šifra artikla
ZY33206ADW	46	METAL/INOX	5	29,800 rpm	40896
ZY25256ADW	60	METAL/INOX	5	29,800 rpm	40897

Brusni čep
6ADW



Dostupne granulacije

- 24
- 30
- 60
- 80
- 120

Veživno sredstvo
 Smola
 Zrno
 Al. oksid
 Upotreba
METAL/INOX

Promjer u mm	Granulacija	Primjena	Pak.	Maximalna RPM	Šifra artikla
ZY20256ADW	30	METAL/INOX	10	47,700 rpm	33838
ZY32006AN	24	METAL/INOX	10	47,700 rpm	33839

Zračna brusilica
PGAS 3/70 HV

š(57649)

Brzina vrtnje 7000 RPM
 Izlazna snaga: 320W
 Ispuh: prednji
 Protočnost zraka: 0,60 m / min
 Promjer crijeva: 8mm
 Težina: 0,78 [kg]



PFERDVALUE:



Zračna brusilica
PGT 1/1000

š(17525)

Brzina vrtnje: 100000 RPM
 Izlazna snaga: 75W
 Ispuh: prednji
 Protočnost zraka: 0,35 m³/ min
 Promjer crijeva: 5mm
 Težina: 0,24 [kg]



FILTER ZRAKA š(7975)



PFERDVALUE:



Električna brusilica
UWER 18/120

š(12039)

Br.okretaja: 11500 RPM
 Potrošnja: 1750 W
 Snaga: 1150 W
 Napon: 230 V
 Navoj: M14
 Težina: 2,8 [kg]



Brusilica za obaranje ivica
UWER 18/110

š(57650)

Br.okretaja: 2750-11000 RPM
 Potrošnja: 1750 W
 Snaga: 1150 W
 Napon: 230 V
 Navoj: M14
 Težina: 7,3 [kg]

Tip obrade:

EDGE FINISH UWER 18/110
 EF-R3/45° TK 230V¹⁾

Karakteristike snage:

- Max visina oborene ivice 6 mm.
- Bezstepena regulacija br. obrtaja.
- Digitalna elektronika za konstantan br. obrtaja.
- Zaštita octoonovnog pokretanja pri padu napona (C/SP).
- Antivibracioni rukovet.
- Meko pokretanje
- Blokada vretena.



PFERDVALUE:



Roto glodalo
SPG 1020/6 MX NCC

Art.No.: 34230



Roto glodalo
SPG 1225/6 MX NCC

Art.No.: 35714



Roto glodalo
SKM 0618/6 MX NCC

Art.No.: 36999



Roto glodalo
SKM 1020/6 MX NCC

Art.No.: 37000



Roto glodalo
KUD 0807/6 MX NCC

Art.No.: 37002



Roto glodalo
ZYA 1020/6 MX NCC

Art.No.: 37003



Roto glodalo
WRC 1020/6 MX NCC

Art.No.: 35356



Roto glodalo
TRE 1220/6 MX NCC

Art.No.: 41261



Roto glodalo
WRC 1225/6 MX NCC

Art.No.: 35715



Roto glodalo
TRE 1230/6 MX NCC

Art.No.: 35716



TURPIJE ZA MOTORNU PILU

PFERD




JESTE LI ZNALI?
PFERD JE NAJVEĆI
EUROPSKI PROIZVOĐAČ
TURPIJA ZA MOTORNE
PILE PREMIUM
KVALITETE

OŠTRAČ ZA LANAC

- š(57651) CS-X-3,2
- š(57652) CS-X-4,0
- š(57653) CS-X-4,8
- š(57654) CS-X-5,16
- š(57655) CS-X-5,5



- | | |
|---------|--------------------------|
| š 11406 | TURPIJA 412 200 X 3,5mm |
| š 11407 | TURPIJA 412 200 X 4,0mm |
| š 11409 | TURPIJA 412 200 X 4,5mm |
| š 11424 | TURPIJA 412 200 X 4,8mm |
| š 11429 | TURPIJA 412 200 X 5,16mm |
| š 11435 | TURPIJA 412 200 X 5,5mm |

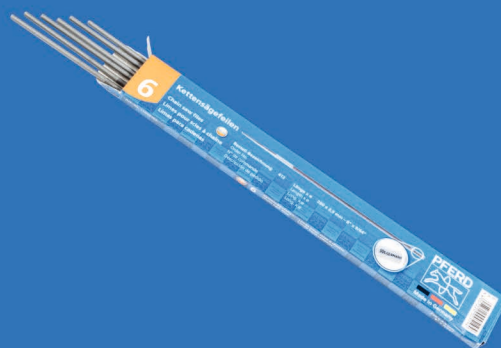

- | | |
|---------|-------------------------------------|
| š 40257 | RUČKA ZA TUPRIJU FH2-10 (3.5-4.5mm) |
| š 35975 | RUČKA ZA TUPRIJU FH3-10 (4.8-5.5mm) |

COMBICLICK

Perfect results thanks to a well-designed system



New! Incl.

VICTO
GRAIN

TRUST BLUE

- Fiber diskovi sa patentiranim sustavom hlađenja i brzom montažom
- Za brzo skidanje materijala sa finom završnom obradom
- Može se koristiti za obradu različitih materijala